




INSTALLATION INSTRUCTIONS 74107 ALTERNATOR SHUTDOWN RELAY

DISCONNECT BATTERY TERMINALS BEFORE ANY WIRING IS PERFORMED

1. Locate desired installation area. Drill holes and install relay.
2. Follow the diagram for proper wiring, install resistor (under the black shrink sleeve), with eye terminals on each end, onto two small lugs using the washers and nuts provided.
3. A ground wire must be attached to either small terminal lug (see diagram).

NOTE: Always verify car shuts off when battery disconnect switch is turned off!

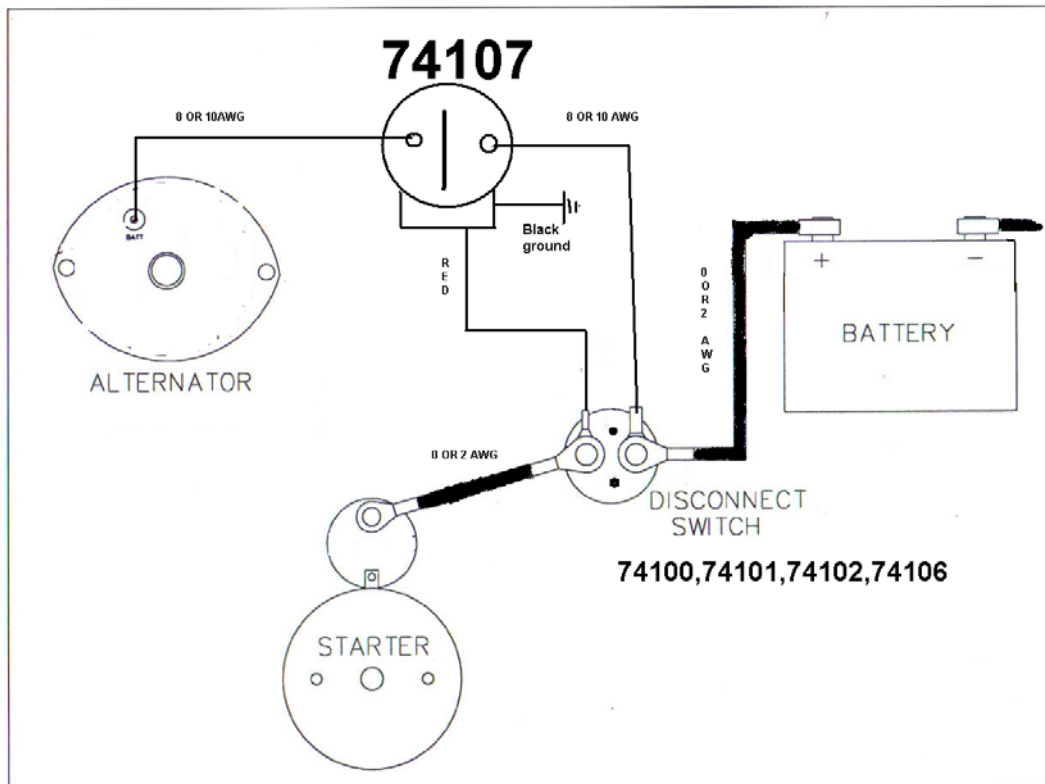

**For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time**

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437-2116
Phone: (203) 453-6571 • Fax: (203) 453-6906