



P/N 74156  
**PARTS LIST**


1-Cable handle-black  
2-Cable terminal-male  
2-8-32 Handle lock screw  
1-Thru-panel nut, black  
12-3/4" Plastic washer  
2-1/2" Lock washer  
2-Rubber protective cap

1- Cable handle-red  
2-Cable set screw  
2-Threaded female terminal, brass  
1-Thru-panel nut, red  
4-1/2" Flat washer  
4-1/2" Nut

**INSTALLATION**

**Caution:** Do not allow the brass threaded female terminal to come in contact with the body panel that the plastic thru-panel nuts pass through, as this may cause arcing and fire may result. Rubber caps are provided to protect the male terminals when not in use.

- 1) Slide the cable handle over the battery cable and strip back approx. 1" of insulation.
- 2) Insert the bare wire into the male cable terminal, thread a cable set screw into the large threaded hole in the terminal and tighten.
- 3) Slide the handle over the terminal so that the holes line up as the terminal is bottomed out. Then insert the 8-32 lock screw through the handle and thread into the brass terminal to lock the handle onto the brass terminal.
- 4) Thread the female brass terminals into the red and black thru-panel nuts with the tapered end facing the thru-panel nut opening.
- 5) Drill a 3/4" hole into the body panel in the desired location. Depending on the thickness of the panel it may be necessary to shorten the "neck" of the thru-panel nut once the plastic washer is slid over the neck and the metal flat washer and hex nut are tightened down to "sandwich" the panel to prevent movement.
- 6) Install a metal flat washer and battery cable ring terminal over the rear of the female threaded brass terminal and tighten with a lock washer and 1/2" nut.

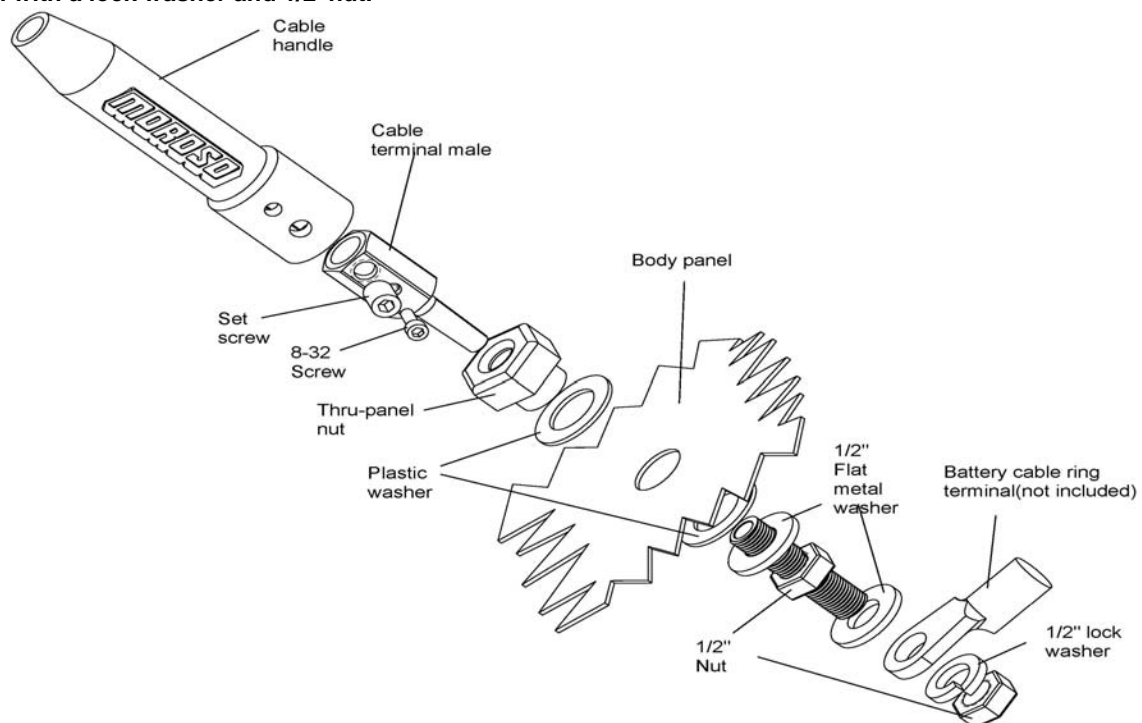

**For Technical Assistance, Call Moroso's Tech Line at  
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time**

MOROSO PERFORMANCE PRODUCTS, INC  
80 CARTER DR • GUILFORD, CT 06437-2116  
Phone: (203) 453-6571 • Fax: (203) 453-6906

Rev. B  
111314

Visit Us At [www.moroso.com](http://www.moroso.com)

74156INST