



INSTALLATION INSTRUCTIONS

COIL COVER

P/N: 74254, MUSTANG 86-93

This kit has been specifically designed to fit the 86-93 Ford Mustang. It will dress up and hide the stock coil, adjacent electrical terminals and wiring. The stock plastic cover will be reused to prevent anything from electrically grounding to your new MOROSO cover. All the necessary fasteners to secure the MOROSO cover in place are included. The cover supplied is raw aluminum. You can polish, anodize or powder coat it to your liking.

| PARTS LIST | | | |
|------------------------------|-----|-------------|-----|
| DESCRIPTION | QTY | DESCRIPTION | QTY |
| COVER | 1 | HOOK DOTS | 7 |
| 1/4-20 BUTTON HEAD CAP SCREW | 1 | LOOP DOTS | 7 |
| 1/4-20 LOCKNUT | 1 | (BLANK) | |



Figure 1



Figure 2



Figure 3

PREPARING COVER:

1. Protect new MOROSO cover from being scratched and rest it face down on a work surface.
2. Cut tabs off of stock plastic coil cover and deburr with a file.

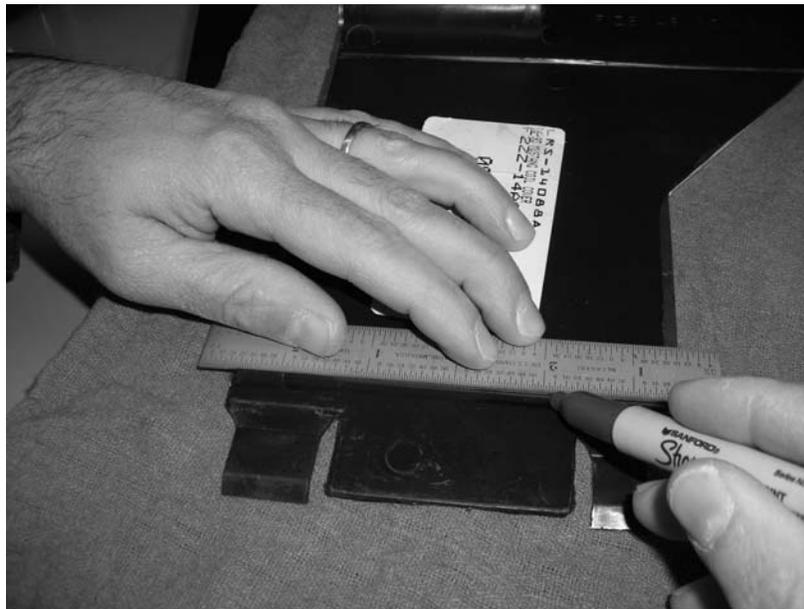


Figure 4

3. Lay stock plastic cover inside of MOROSO cover. Mark bottom edge of plastic cover so it does not hang below MOROSO cover and cut.

PREPARING COVER (cont'd):

4. Air bag warning label on the stock plastic cover should be removed and adhered to the MOROSO cover. If you fail to transfer the warning label or hide the warning label from view, it is your responsibility to comply with the warning and to advise any future owner or mechanic of the warning.
5. Clean inside of MOROSO cover and face of stock plastic cover with rubbing alcohol.



Figure 5

6. Peel and stick loop dots in approximate positions shown in Figure 5 to the stock plastic cover.
7. Without peeling the backing, align and mate the hook dots to the loop dots.
8. Peel the backing off of the mated hook dots.
9. Position stock plastic cover into the MOROSO cover. Then press and hold in place for 30 seconds.



Figure 6

INSTALLATION:

1. Park car so that you can safely work at the left front of the vehicle.
2. Turn the front wheels all the way to the left.
3. Remove stock plastic cover and set aside.



Figure 7

4. Remove and save the fender bolt show in Figure 7.
5. Pre-fit cover into position. Confirm if any factory wiring needs to be re-secured and/or if it is rubbing against the edge of the MOROSO cover. Adjust/reroute wiring as needed.



Figure 8

6. Re-position the MOROSO cover and secure it to the car using the fender bolt. Do not tighten at this time. Be sure that coil wire is above the side tab on the cover as shown in Figure 8.
7. Line up hole in shock tower tab and install button head cap screw.

INSTALLATION (cont'd):



Figure 9

8. From inside the front wheel well (Figure 9), install the locknut and snug button head screw.
9. Adjust MOROSO cover into its final position and tighten button head cap screw and locknut.
10. Tighten fender bolt.



This vehicle also had installed:

- 74253: Brake Booster Cover
- 85514: Air-Oil Separator

**For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, (203) 458-0546 8:30am-5:00pm EST**

MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437-2116
Phone: (203) 453-6571 • Fax: (203) 453-6906

Visit Us At www.moroso.com